



FSR2 Formula Wheel




User Manual 使用说明书

01 Product Introduction

- 4.3-inch Touchscreen HD Display
- Fully Customizable UI System
- Toray 3K Twill Carbon Fiber
- 6 Magnetic Paddles
- 16.7 Million Color Shift Indicator and Flag Lights
- Aerospace-grade Aluminum Alloy

02 Quick Release Instructions

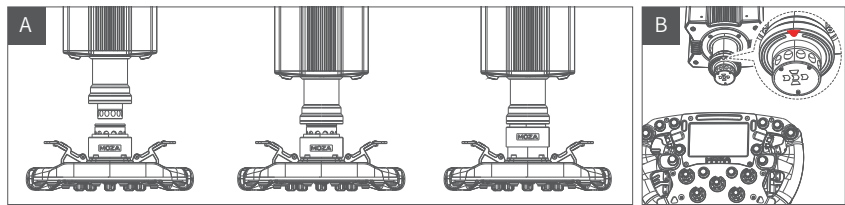

Method A:

- Align the 6 ball bearings on the wheel QR with the 6 notches on the base QR mount.
- Press the quick release onto the base mount, keeping the bearings and notches aligned.
- The quick release will automatically lock into place; if it doesn't, then remove it, recheck the alignment and try again.
- To remove the wheel, squeeze the black quick release part with the MOZA logo towards the wheel with both hands and pull out the wheel at the same time.


Method B:

- Rotate the wheelbase until you locate the arrow directly above the base.
- Center the wheel and attach it to the wheelbase.
- To remove the wheel, use both hands to squeeze the black quick release part with the MOZA logo towards the wheel with both hands and pull out the wheel at the same time.



1

03 Wheel Configuration

- Using MOZA Pit House, our software suite, the FSR2 steering wheel can easily be set up and configured to your liking.
- RPM indicator switch modes: Choice of rpm, off and constant.
 - Indicator modes: There are two modes, mode 1 and mode 2; both are explained in detail when the mouse is hovered over the corresponding option.
 - RPM indicator timing: Choose between early, normal, late or custom to match in-game RPM timing.
 - Brightness: The brightness of the buttons and RPM LEDs are adjustable.
 - Button combinations: Click on the button combination description tab on the upper right corner of the steering wheel page to show a list of button input numbers and programming input combinations.
 - Change RPM light colors: When hovering the mouse over the RPM light, a color palette will appear for changing the colors. Simply click on a preferred color to set the indicator light color. Alternatively, clicking the colored icons on the palette opens the RGB color editor for additional color options.
 - Change button colors: When hovering the mouse over the buttons on the steering wheel image, a color palette will appear for changing the colors. Simply click on a preferred color to set the button light. Alternatively, clicking the colored icons on the palette opens the RGB color editor for additional color options.
 - Select Dash Display Screen UI: Hover over the screen UI to reveal a play button. Click it to choose that UI design.
 - Edit Digital Dash Display UI: Hover over the screen UI to reveal an edit button. Click it to edit the display UI. For advanced customizations, access the Dash Display Screen UI Editor in the MOZA Pit house.
 - Screen Brightness: Adjust screen brightness by dragging the slider.

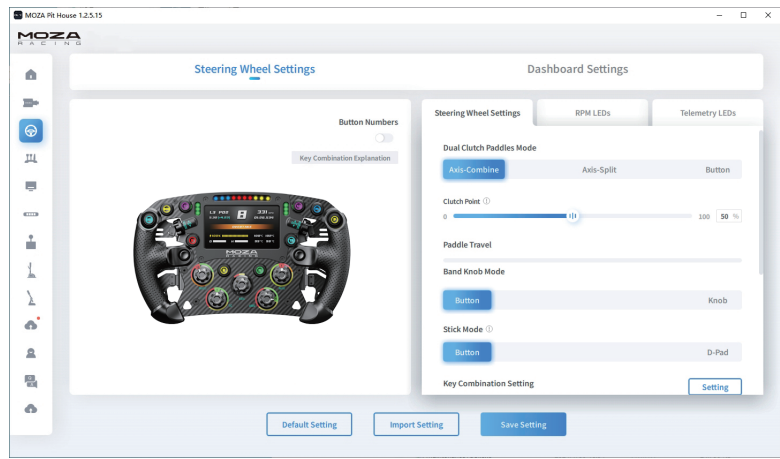

2

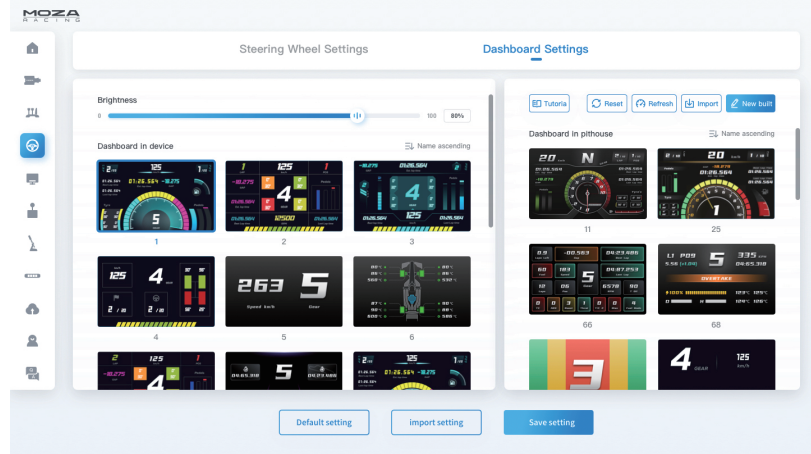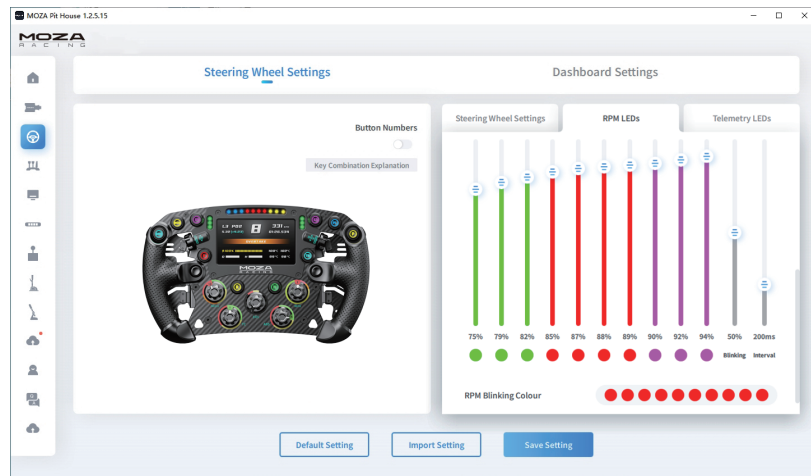


(For further information on specific steering wheel settings or functions using the MOZA Pit House Suite, visit our official website at www.mozaracing.com)

3

04 Button Combination Functions

Utilize button combinations to adjust maximum steering angle, switch joystick modes, configure dashboard UI interfaces, set base parameters, and more. Detailed instructions can be found on the Steering Wheel Settings page.

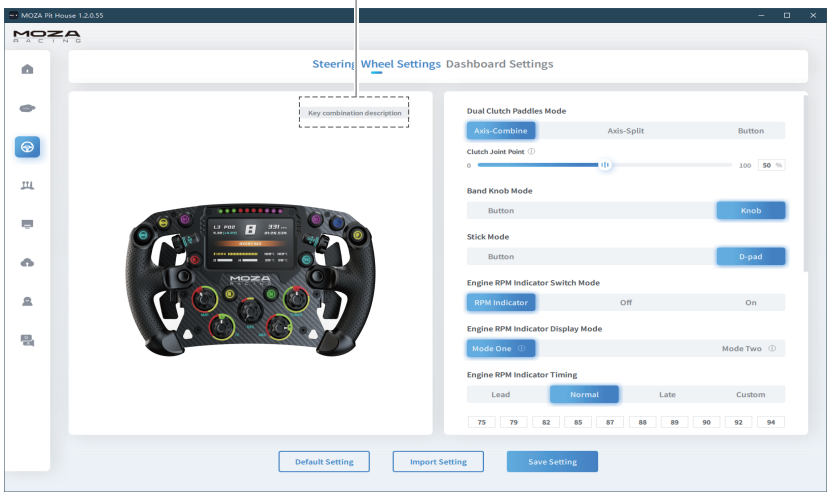

05 Packing List

- FSR2 Racing Formula Wheel
- Tool kit: Hexagon screwdriver
- Cloth bag

4

06 Specifications


Size: 280mm standard formula wheel
Display Size: 4.3 inches
Display Resolution: 800x480
Grip Material: Microfiber leather
Frame & Face Plate Material: 5mm thick carbon fiber
Shifter Material: 3mm thick carbon fiber
Back Plate Material: Aerospace-grade aluminum alloy
Shifter Paddles: 2
Function Paddles: 2
7-Way Switches: 2
Flag Indicators: 6
Clutch Paddles: 2
Backlit Programmable Mechanical Buttons: 10
Thumb Encoders (depressible): 2
Rotary Encoders: 5
LED RGB Beads: 10
LED Colors: 16.7 million
Intelligent Telemetry: Supported
Fully Adjustable RPM LEDs through MOZA Pit House: Supported
Release Method: MOZA All-aluminum QR
Communication Method: Wireless and via conductive slip ring Compatibility
Sensor: Non-contact hall sensor
Clutch Paddle Modes: Composite axis, independent axis, or button

5

01 产品介绍

- 4.3英寸触控高清显示屏
- UI自定义编辑系统
- 东丽3K斜纹碳纤维
- 磁吸六拨片系统
- 1670万色换挡提示灯和旗语灯
- 航空级铝合金

02 快拆使用方法

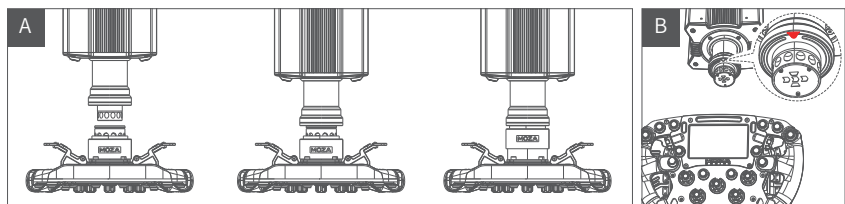

图A:

- 将方向盘快拆母头上6颗钢珠的位置与基座快拆公头的6个凹槽对应
- 将快拆往盘面方向按压
- 快拆将自动归位锁紧,若无归位,可尝试轻微转动盘面或取下后再安装
- 如需拆取盘面,用双手捏住黑色带logo的外壳,同时拔出盘面

图B:

- 找到基座正上方的箭头
- 找到方向盘正面,正插进去即可安装
- 如需拆取盘面,用双手捏住黑色带logo的外壳,同时拔出盘面

6


03 方向盘配置

在MOZA Pit House软件中可以方便快捷地对方向盘进行设置

- 指示灯开关模式:指示灯状态调节,分为随速转动,关闭和常亮
- 指示灯显示模式:共分为模式一和模式二,当鼠标移动到选项上时会弹出详细解释
- 转速率提示设置:根据转速与换挡指示灯亮起的时机关系,分为提前型,标准型,极限型和自定义模式
- 转速率模式:支持百分比和转速2种模式。百分比模式即转速达到设置的最大转速的百分比时换挡提示灯亮起。转速率模式即转速达到设置的转速绝对值时换挡提示灯亮起
- 亮度调节:支持调节转速率灯亮度
- 方向盘组合键:点开方向盘图片右上角的组合键说明,记住组合键后即可快速调节功能
- 指示灯颜色调节:鼠标悬停在灯珠上时,会展示调节颜色的色盘,选中单击即可设置转速率灯颜色。点击色盘上彩色的图标会显示RGB颜色的编辑器,支持更多的颜色选择
- 切换仪表:鼠标悬停在仪表UI上时,会展示使用按钮,点击使用后方向盘的仪表盘会展示该仪表UI
- 编辑仪表:鼠标悬停在仪表UI上时,会展示编辑按钮,点击编辑进入仪表编辑界面内对仪表UI进行修改。仪表自定义功能详见Pit House中的仪表UI编辑器
- 屏幕亮度:拖动屏幕亮度的滑块支持调节方向盘的屏幕亮度



7

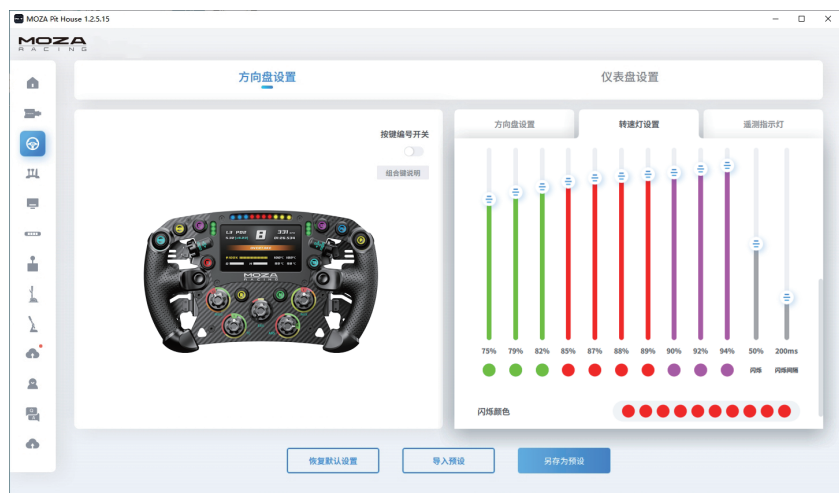

(详细方向盘设置与功能,请访问MOZA Racing官网)

8

04 组合按键说明

组合键支持切换最大转向角,摇杆模式,仪表盘的UI以及基座参数等功能,具体的功能说明见方向盘设置页面的组合键说明



05 包装清单

- FSR2方向盘
- 工具包:六角螺丝刀
- 便携布袋

9

06 产品参数

尺寸:280mm标准方程式盘尺寸
显示屏尺寸:4.3英寸
显示屏分辨率:800x480
环身材质:超纤皮
骨架和面板材质:5mm厚碳纤维
拨片材质:3mm厚碳纤维
外壳材质:航空级铝合金
换挡拨片:2个
功能拨片:2个
7向开关:2个
旗语灯:6颗
双离合拨片:2个
发光机械键盘式按键:10个
拇指按钮(可按压):2个
波段按钮:5个
高亮LED RGB灯珠:10颗
LED色彩:1670万色
智能调速:支持
通过MOZA Pit House设置灯光:支持
拆装方式:现实赛车快拆
信号传输方式:无线和导电滑环
拨片感应方式:霍尔无接触式感应
双离合拨片模式:合成轴/独立轴/按键

10

产品保修卡

产品型号	购买日期
用户姓名	用户电话
产品条码	通讯地址

经销商信息(签章)

产品保修条例

保修期

自购机日起,基座主体,方向盘,踏板和仪表显示屏保修12个月。设备外壳、说明书、线材、螺丝、扳手、包装等不在“一年免费保修服务”范围内,但您可以选择有偿服务。
购买者在以下条件下不享受免费保修服务,但您可以选择有偿服务。

- 超过三包有效期的;
 - 无三包凭证及有效发票的,但能够证明该产品在三包有效期内的除外;
 - 包修凭证上的型号与修理产品型号不符或者涂改的;
 - 非本公司特约维修人员拆卸造成损坏的;
 - 因不可抗拒力造成损坏的;
 - 未按产品使用说明要求使用、维护、保养而造成损坏的。
- 保修期限鉴于产品部位、不同国家法律法规等差异,将有所不同。相关国家与区域的保修期限,请咨询MOZA官方或购买时联系的MOZA授权经销商。



尺寸:126*180mm

材质:80G书写纸(骑马钉)